

ADDENDUM NO. 1

Date: January 6, 2011

To: All Prime Bidders of Record


From: HDR|Claunch & Miller
4635 Southwest Freeway, Suite 1000
Houston, TX 77027
HDR Engineering Inc. Texas Reg. No. 754

Project: Houston Avenue Paving, Drainage & Utility Improvements Project
City of League City
HDR|C&M Job No.: 10-019



This addendum forms a part of the Contract Documents, and modifies the original specifications, drawings, and addenda as noted below. Unaltered provisions and drawings of the Contract Documents shall remain in effect. Acknowledge receipt of this Addendum in space provided on the bid proposal. Failure to do so may subject the bidder to disqualification.

1. Please find attached the Trash-Trooper Detail TTB-4x5 by Park Environmental Equipment Company. Contact Will Smith at (713) 937-7602 for information and prices. The Contractor shall provide a submittal prior to ordering and installation.

SEE FOLLOWING ATTACHMENT



John D. Rudloff
1-6-11

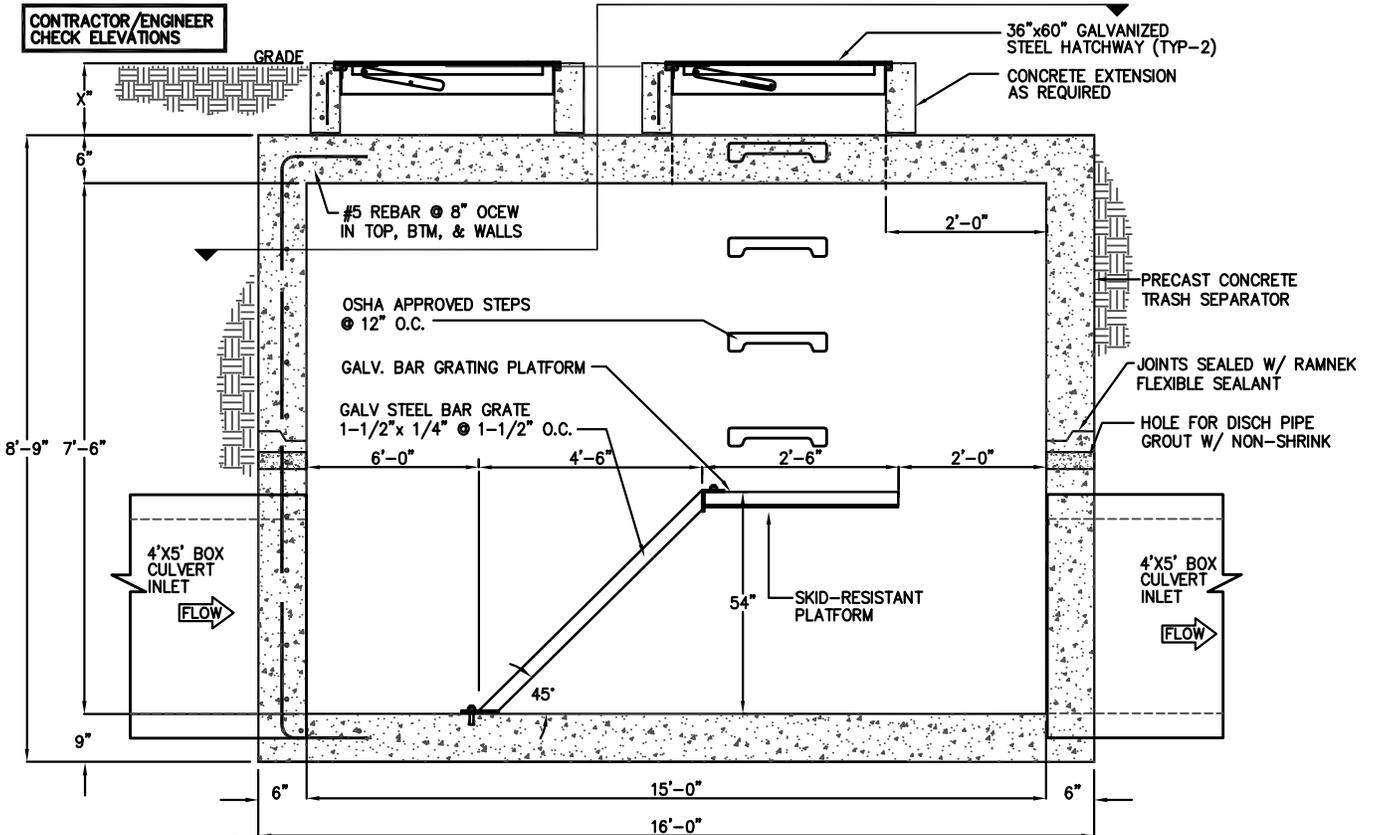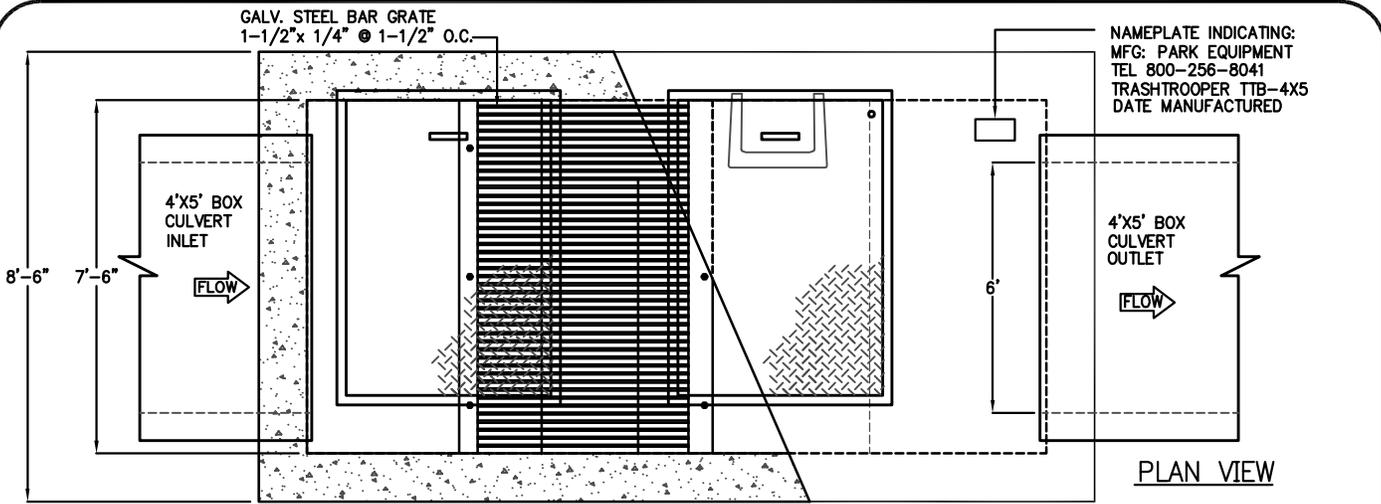

HEAVIEST PIECE = 22,000 LBS

ELEVATION

Specifications

CONCRETE : Class II concrete with design strength of 4500 PSI at 28 days. Unit is of monolithic construction at floor and first stage of wall with sectional riser to required depth. Combined assembly weight of approximately 36,100 lbs.

REINFORCEMENT: Grade 60 reinforced. Steel rebar conforming to ASTM A615 on required centers or equal. Bar bending & placement shall comply with the latest ACI standards for precast concrete. Lifting inserts shall be installed per mfg's requirements.

STEEL: All steel shall be A36 steel welded in accordance to AWS D1.1. All steel shall be hot-dipped galvanized after fabrication.

PROJECT :	CITY OF LEAGUE CITY
CUSTOMER :	
ENGINEER :	HDR C&M
DATE:	01/05/11



TEL (713) 937-7602
FAX (713) 937-4254
WATS (800) 256-8041

TRASH-TROOPER SOLIDS INTERCEPTOR

SCALE	NONE	DWG. NO.	TTB-4X5	REV.	A
DATE	01/11				